



MAKES IT HAPPEN

HBTZ 247224 TRIDEM

TRIDEM LOW BED TRAILER



**TRADE FAIR
DEBUT**

TRADE FAIR DEBUT!




MAKES IT HAPPEN

STANDARD EQUIPMENT

BPW - low bed axles, lift axle (first axle), electronically controlled air suspension (ECAS) with two ride heights, lowering function for safe loading
Compressed air brake, brake system in accordance with European regulations, spring-loaded parking brake
24-V multi-chamber lights, shock-resistant and vibration reducing, fitted with underrun protection, 15-pin connecting cable
Tow bar with 50-mm-diameter towing ring, traction bar hydraulically lifted and lowered, low-maintenance silent bushes
Solid welded construction, frame made of high-strength fine-grained steel
Full-width cross bars for maximum stability, rear climbing aids on the ramp for maximum safety during loading and unloading
8 pairs of lashing rings, 10 tonnes, recessed in trailer floor 6 pairs of tie-down points, 2 tonnes over wheel arch 5 pairs of stanchion recesses 3 tonnes, for 90 x 50 mm stanchions (optional)
50-mm soft wood floor covering
Single-section hot-dip galvanised ramps (2700 mm x 750 mm) with 50-mm softwood covering, can be laterally adjusted, direct-acting spring lifting mechanism for easiest operation, reliably secured via turnbuckle and counter stop
Chassis frame hot-dip galvanised in an immersion bath
Folding side impact protection
Two wheel chocks with holder
Side and rear contour markings,

ACCESSORIES* (available as an option)

BPW chassis LIA-STA-NLA Lower ride height with twin tyres (205/65R 17.5") 1 x lift axle, 1 x rigid axle and 1 x LL axle with 9-t axle load ECO Plus storage, SN 3020 drum brake, Airlight II suspension BPW Active Reverse Control (ARC)
Tridem 24/30 3m package
Tridem 24/30 warning package
Tie-down eyes, 6 tonnes, in the outer frame, screwed
Aluminium side plate 400, can be folded down
Aluminium side plate painted in RAL colours
Sheet metal storage boxes with support rails, fitted lengthways below the loading area
Hydraulic ramp lifting mechanism for single-piece ramps
Lateral hydraulic ramp shift
Left and right hydraulic support feet
24-V LED oval reversing light
Rubber coating for single-piece ramps
Rubber coating on aluminium panels for the entire loading area
Additional accessories available on request

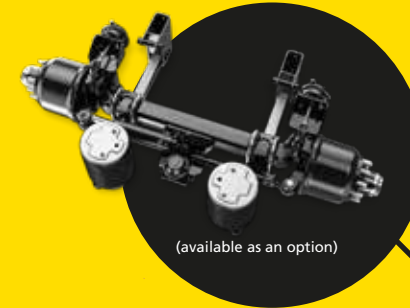

(available as an option)

**BPW additional steering
Active Reverse Control**



TECHNICAL DATA

Internal dimension	approx. 7200 x 2480 mm
Overall dimension	approx. 9270 x 2480 x 3310 mm
Total permissible weight	24,000 kg
Load capacity	approx. 18,550 kg
Tyres	twin 205/65 R17.5 inch
Load height	approx. 780 mm

Important safety information! The trailer may only be used with express adherence to all road traffic, professional association and load securing regulations. We assume no responsibility for printing or other errors or omissions. Subject to technical modifications. Illustrations are similar, can include accessories available at an extra charge. Some trailers show special equipment. Net prices in Euro plus applicable VAT and shipping costs, as well as registration certificate. Products are subject to ongoing technical changes. All dimensions are approximate values and refer to the standard vehicle without accessories. Printed in Germany. Reprint prohibited. As at: 03/19.